

Quick guide to check firmware on SIPROTEC 4 relays – through front panel


Please refer to the following steps to check the firmware of the relay and EN100 – through relay front panel.
(Menu – Settings (4) – Setup/Extras (10) – MLFB/Version (6))

1. **Press Menu – to access the MAIN MENU**
2. **Press 4 or the right navigation button to access SETTINGS**

(To enter a particular menu, use the up & down navigation buttons until it is highlighted and you can press the right navigation button or the number key assigned to it.)



3. Press 10 or the right navigation button to access SETUP/EXTRAS

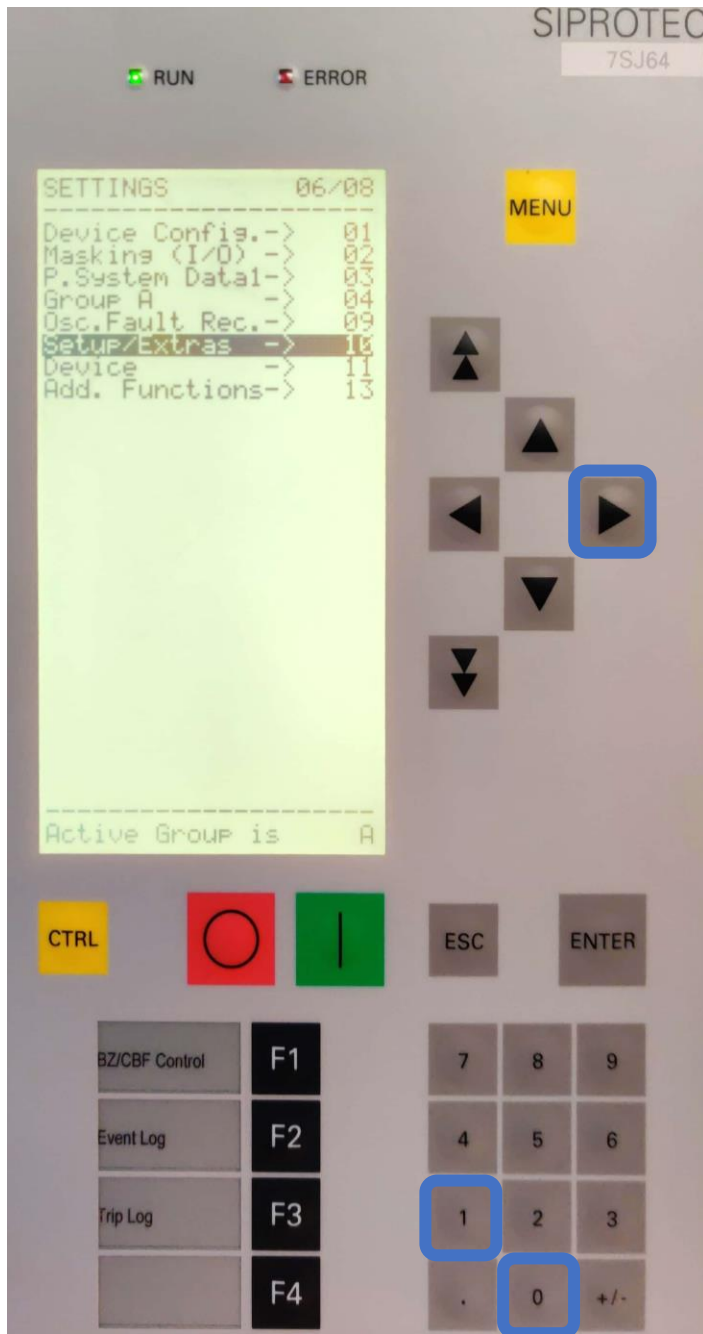


4. Press 6 or the right navigation button to access MLFB/version.



5. This will display the:

- a. **MLFB code:** 7SJ6411-4EB92-3FG2-----0S
- b. **Serial number:** BF0607046256
- c. **Relay firmware version:** v04.64.01
- d. **Modul B is the SCADA interface firmware version:** v04.26.01
Protocol: IEC61850
- e. Modul C is empty in this example but could be a line diff PDI
- f. **P. set is the Parameter Set version: 04.64.01**

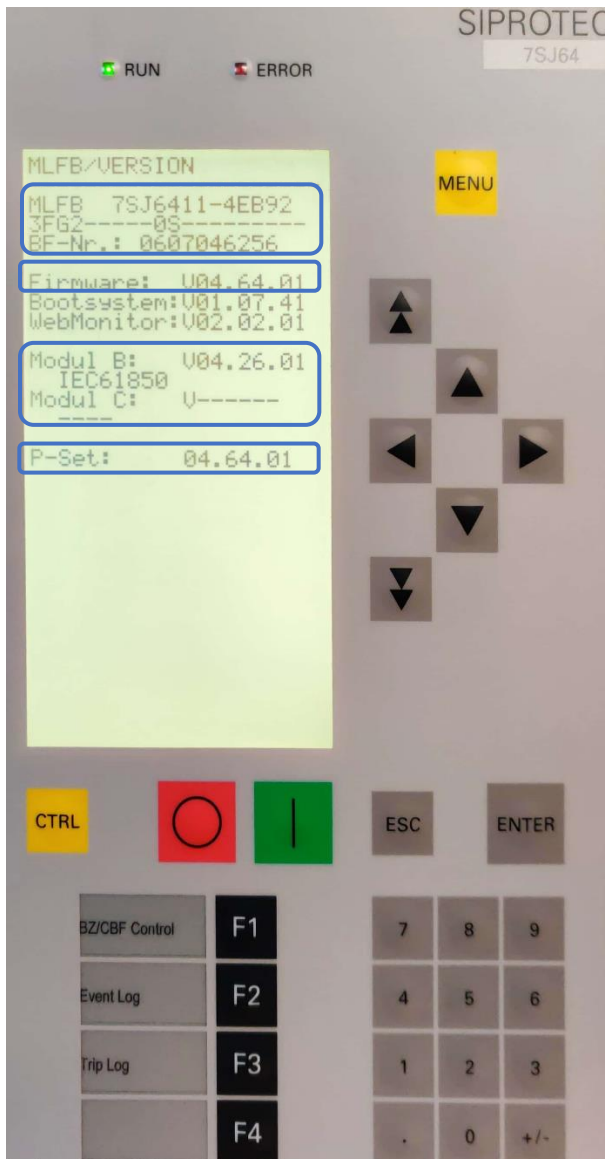

Information typically needed for support purposes

Please feel free to contact us if you have any questions.